

# Atlas 400 (465kw) SL M




The 400 SL M is the second most compact solution for burning solid and liquid waste with a high water content, (above 50%), suitable for offshore supply vessels and small merchant vessels, and where no waste sluice is required.

## SPECIFICATIONS

## DATA

|   |  |
|---|--|
| Combustion Capacity (kW)  | 465  |
| Combustion Capacity (kcal/h)  | 400.000  |
| Combustion Capacity Solid Waste<br>(IMO waste specification)                | 170 L/charge.  |
| Combustion Capacity Liquid Waste<br><br>(IMO standard is 20% water content) | 42 l/h at 0% water content<br><br>53 l/h at 20% water content<br>84 l/h at 50% water content |

*A waste sluice is not available for this incinerator type*

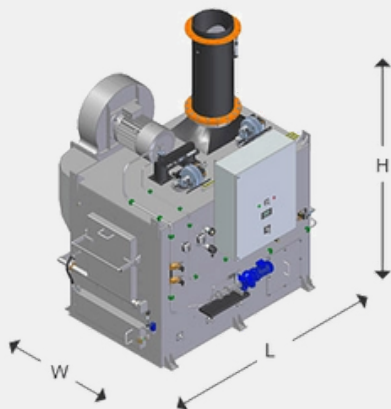

## INCINERATOR DIMENSIONS

|        |         |
|--------|---------|
| Width  | 1898 mm |
| Height | 2363 mm |
| Length | 1730 mm |



### TANK DIMENSIONS

1200 SP

Width 1140 mm

Height 1363 mm

Length 1802 mm

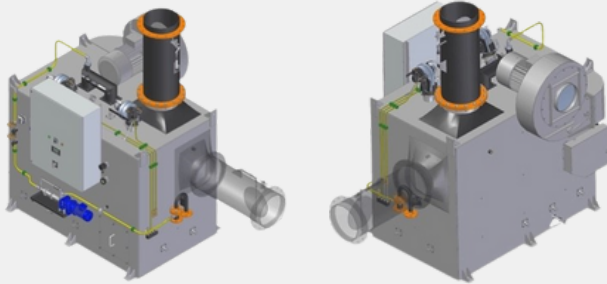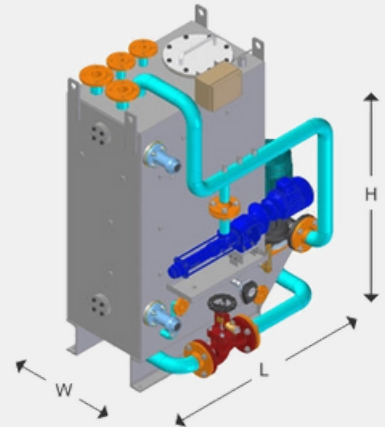

### FLUE GAS OUTLET ALTERNATIVES

In case of height restrictions in the incinerator room we can offer the 200 type incinerator with the outlet in the side as shown below.